S & TWIN-S TOP MOUNT CONTROLS

Single function, one or two lever versions. Highly polished, stainless steel covers. Suits 33C and 43 C type control cables.

STAINLESS STEEL COVERS & HANDLE

SIMPLE, RUGGEDCOMPACT DESIGN

SINGLE FUNCTION ONE OR TWO LEVER





SINGLE FUNCTION, TWIN LEVER. POPULAR ON COMMERCIAL VESSELS.

Single function, one or two lever versions. Highly polished, stainless steel covers.

Suits 33C and 43 C type control cables.



Features

- Highly polished corrosion-resistant stainless steel covers and handle.
- Simple, rugged, compact design.
- Optional neutral safety switch to prevent starting in gear.
- Optional hand lever extension.
- Optional gear detent kit (if used in dual stations use on main operating station only).
- Standard control suits 33C and 4300 type cables with 4300 hardware kit.
- Mechanical advantage: shift 2.77:1 / throttle 2.77:1
- Meets/exceeds all applicable industry standards.

ORDER INFORMATION	
TYPE OF CONTROL	PART NO.
Twin S	CH5200P
Single S	CH5210P
ACCESSORIES & PARTS	PART NO.
Clutch detent kit	022328
In Series dual station kit - 30 series (2 required for twin control)	039489-002
In Series dual station kit - 40 series (2 required for twin control)	042152
Neutral safety kit	047307
Throttle hold kit (one per lever, prevent throttle creep)	306997
Ball Knob, Red	035232-001**
Ball Knob, Black	035232-004**
Stainless Steel Throttle Knob (grooved)	CA69052P**
Stainless Steel Throttle Knob (smooth)	CA69051P**
Hardware Kit, Twin	061001
Hand Lever Extension	036773
NOTE: XX = Cable length in feet from end to end. ** Fits most control levers with 3/8-24 threads	Continued on next page




SINGLE FUNCTION, TWIN LEVER. POPULAR ON COMMERCIAL VESSELS.

ORDER INFORMATION	
COMPATIBLE CABLES	PART NO.
Universal 3300 Types	
3300 cable (standard)	CC230XX
3300 cable (midrange)	CC330XX
XTREME 3300 cable (premium)	ССХ633ХХ
ACCESSORIES & PARTS	PART NO.
Mercury 3600 type cabel (premium)	CCX630XX
Universal 43 Types	
XTREME 4300 BC cable	CCX430XX
XTREME 4300 CC cable	CCX433XX

NOTE: XX = Cable length in feet from end to end.

Technical Data

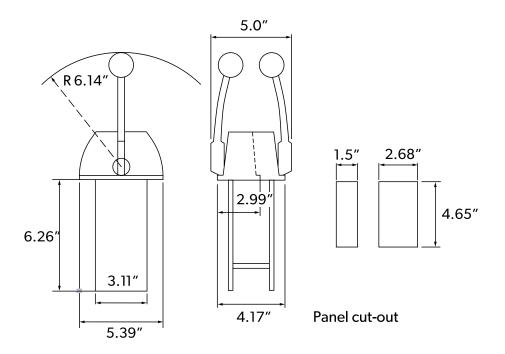

^{**} Fits most control levers with 3/8-24 threads