

POWER & CONTROL

# NFB SAFE-T II ROTARY STEERING

Major OEMs use Dometic Safe-T II, and so will your customers. It's the next generation of Safe-T, the world's #1 rotary steering system - rugged, compact, lightweight, and with patented No FeedBack technology.

**MINIMAL CLUTCH**  
FREE PLAY

**ULTRA-SMOOTH**  
THREE-TURN SYSTEM

**NO FEEDBACK™**  
STEERING MECHANISM




Mobile living made easy.

 **DOMETIC**

# TAKE THE WORK OUT OF STEERING MOST V-4 OUTBOARD POWERED BOATS.

NFB Safe-T II single-cable systems are suitable for most single-station boats with a single non-power-assisted outboard engine up to V-4 and minimal engine flutter or steering instability. Safe-T II accepts wheels up to 16" diameter. (NFB Safe-T II is available in single cable configuration only). Replaces standard Safe-T® steering without dash modifications.

NFB™ Safe-T II Single Cable System  
(Steering Wheel not included.)

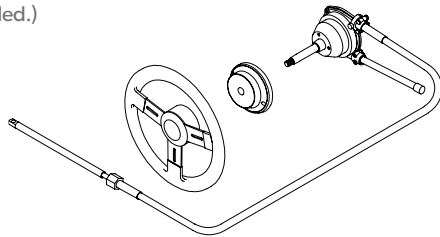

## Features

- Patented No FeedBack™ Steering mechanism
- Quick response of 3 turns lock-to-lock
- Minimal clutch free play
- Standard 3/4" round tapered steering shaft
- Stainless steel cable output ends
- Fast, easy installation: uses Dometic Quick Connect (QC) cable
- Kits include: cable, helm, 90° bezel and hardware
- Meets A.B.Y.C. standards
- Meets N.M.M.A. certification requirements

ORDER INFORMATION	
COMPLETE SYSTEMS	PART NO.
NFB Safe-T II Steering Kit (Kit sold in lengths 10-20 feet)	SS132XX*
COMPONENTS	
NFB Safe-T II Helm	SH5150P
QC Cable	SSC62XX
Rotary NFB Bezel (90°)	SB27150P
OPTIONS	
NFB Safe-T II Tilt Dash Module (Includes tilt helm and tilt mechanism)	SHT91190
NFB Safe-T II Tilt Helm	SH91190P**
Sport Tilt Mechanism	SH91800P
Sport Plus Tilt Mechanism	SH91900P
Bezel (20°)	SB27483P
Cable Gard (fits most tilt tubes)	SA39329P
Steering Wheel Hardware Kit (Old #2745417P)	SA27454P
Spent Travel Tube (Rotary NFB)	SA38603P

XX = Length in feet

\* Sold in lengths of 10-20 ft

\*\* Requires tilt mechanism to complete Tilt Steering system installation.